



BP 19 - 19'' Vertical Beams

HOME > CATEGORIES > INTERNAL BUILDING SYSTEMS > BP-19 - 19'' VERTICAL BEAMS

Vertical Beams are used in enclosures where electrical apparatus is mounted on various depths or heights. 19" Vertical Beams are perforated vertically with 9.2×9.2 mm square holes in the "U" shape spacing. Elements are assembled using M6 cage nuts and screws with washers. For mounting in RSA or SZA enclosures it is necessary to install WRG - Depth Adjustment Brackets (p. 132) in advance.

Beams are made of 2 mm thick galvanized steel sheet.

GALERIA PRODUKTU WRAZ Z PRZYKŁADOWYMI REALIZACJAMI

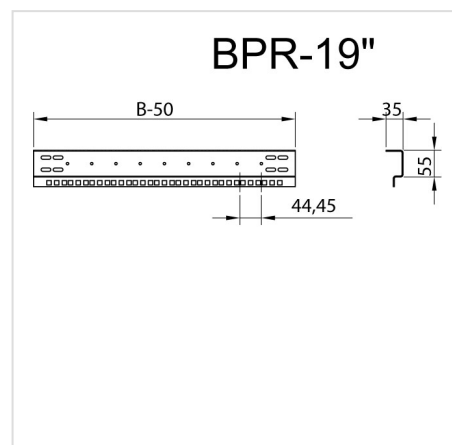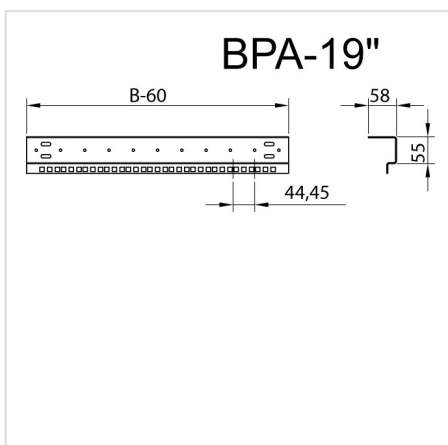

BPA-19 - Vertical Beam for RSA, SZA (left + right) - 19''

**No. Description - Enclosure dimension (H) Catalogue No.
Rack Unit height**

1	BPA-19-300 - 5U	113-001
2	BPA-19-400 - 7U	113-002
3	BPA-19-500 - 9U	113-003
4	BPA-19-600 - 12U	113-004
5	BPA-19-800 - 16U	113-005
6	BPA-19-1000 - 21U	113-005
7	BPA-19-1200 - 25U	113-006

BPB-19 - Vertical Beam for RSB, SZB (left + right) - 19''

**No. Description - Enclosure dimension (H) Catalogue No.
Rack Unit height**

1	BPB-19-800 - 15U	138-001
2	BPB-19-1000 - 20U	138-002
3	BPB-19-1200 - 24U	138-003
4	BPB-19-1400 - 29U	138-004
5	BPB-19-1600 - 33U	138-005
6	BPB-19-1800 - 38U	138-006
7	BPB-19 -2000 - 42U	138-007