

Interface relay Series 58.3

[HOME](#) > [CATEGORIES](#) > [EX RELAYS](#) > [SEPARATORS AND RELAYS EX](#) > [ATEX ZONE](#) > [INTERFACE RELAY SERIES 58.3](#)

Relay coupling module (interface relay) 2 or 4 changeover contacts (2P, 4P), 27mm wide, with screw or push-in terminals. ATEX compliance (EX ec nC). HazLoc Class I Division 2 Group Compliance

A, B, C, D - T5.

Complies with:

EN 60079-0

EN 60079-15

EN 60079-7:2015

Directive 2014/34/EU

PRODUCER

Finder

APPLICATION

- Petrochemical and pharmaceutical chemical plants
- Gas stations, garages and underground areas
- Spray cabins (liquids)
- Gas power plants
- Gas bottling plants

GENERAL INFORMATION

58.3X Series:

The interface consists of:

socket, relay and EMC/timer module.


Mounting on DIN 35 rail. Contact options:

2 changeover contacts 10 A / 250(400) V AC,

4 changeover contacts 6 A / 250(400) V AC
The relay is available in many versions:

- with mechanical activation indicator,
- with LED module (AC/DC)
- with EMC and LED module (DC)
- with EMC varistor and LED module (AC/DC)
- with time module (12-24 V AC/DC)

GALERIA PRODUKTU WRAZ Z PRZYKŁADOWYMI REALIZACJAMI

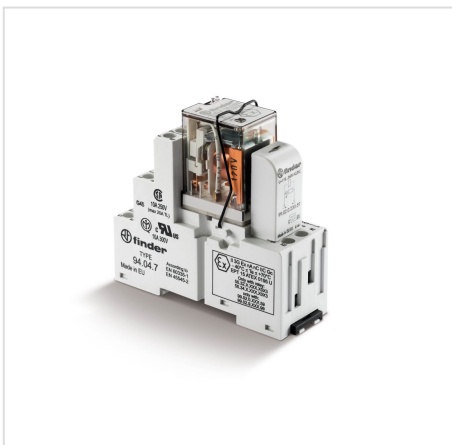

DOCUMENTS

 [Datasheet Series 58](#) Kliknij aby pobrać

 [EPTI 15 ATEX 0195 U](#) Kliknij aby pobrać

 [Declaration of Conformity](#) Kliknij aby pobrać

 [Datasheet Series 86](#) Kliknij aby pobrać

 [EPTI 17 ATEX 0264 U](#) Kliknij aby pobrać

 [Declaration of Conformity](#) Kliknij aby pobrać

58.3 series interface relay

No.	Catalog code	Contacts	Version contacts	Voltage coil	Modules
1	58.32.9.024.0048	2P		24 V DC	LED
2	58.32.9.024.0049	2P	gilded	24 V DC	LED + mechanical activation indicator
3	58.32.9.024.0058	2P	gilded	24 V DC	LED + DC diode
4	58.32.9.024.0059	2P	gilded	24 V DC	LED + mechanical activation indicator
5	58.32.9.024.5059	2P	gilded	24 V DC	LED + mechanical activation indicator
6	58.32.8.120.0049	2P	gilded	120 V AC	LED + mechanical activation indicator
7	58.32.8.230.0049	2P	gilded	230 V AC	LED + mechanical activation indicator
8	58.34.9.024.0048	4P	gilded	24 V DC	LED
9	58.34.9.125.0048	4P		125 V DC	LED
10	58.34.9.024.5048	4P		24 V DC	LED
11	58.34.9.125.5048	4P		125 V DC	LED
12	58.34.9.024.0049	4P		24 V DC	LED + mechanical activation indicator
13	58.34.9.012.5058	4P		12 V DC	LED + DC diode
14	58.34.9.024.0059	4P		24 V DC	LED + DC diode + mechanical activation indicator
15	58.34.9.024.5059	4P		24 V DC	LED + DC diode + mechanical activation indicator
16	58.34.8.110.0048	4P		110 V AC	LED
17	58.34.8.230.0048	4P		230 V AC	LED
18	58.34.8.110.5048	4P		110 V AC	LED
19	58.34.8.230.5048	4P		230 V AC	LED
20	58.34.8.110.0049	4P		110 V AC	LED + mechanical activation indicator
21	58.34.8.120.0049	4P		120 V AC	LED + mechanical activation indicator

86 series timer module for 58 series interface relay

No. Catalog code Tension Functions

1	86.30.0.024.0073	12-24 V AC/DC	Socket mounting. Knob on the top of the socket for time changes 7 time ranges 2 functions: AI: Switching on delay; DI: Switching on for the set time
---	------------------	---------------	--