

PM IP 65 - Monitor enclosure

HOME > CATEGORIES > STEERING CABINETS > PM IP 65 - MONITOR ENCLOSURE

PM – is an enclosure dedicated for monitor and characterized by high tightness and modern design. The standard offer includes 3 dimensions.

Type	Corrosivity category	Material / additional description	Coating
PM-ST	C2	steel sheet	RAL7035
PM-OH	C4**	stainless steel 1.4301 (AISI 304)	BRUSHED
PM-KO	CX**	acid-proof steel 1.4404 (AISI 316L)	BRUSHED



GENERAL INFORMATION:

- Ingress protection according to IP code: 65
- Impact resistance according to IK code: 10
- Operating temperature range: od $-40 - +80^{\circ}\text{C}$

BASIC DATA:

- Body: monobloc type, welded
- Cable entry: there is a gland plate in the rear panel
- Grounding: threaded grounding studs in the enclosure body

GALERIA PRODUKTU WRAZ Z PRZYKŁADOWYMI REALIZACJAMI

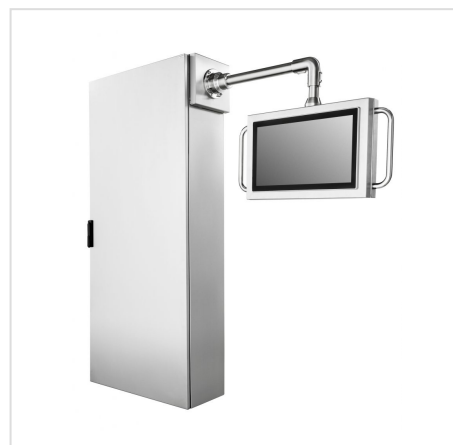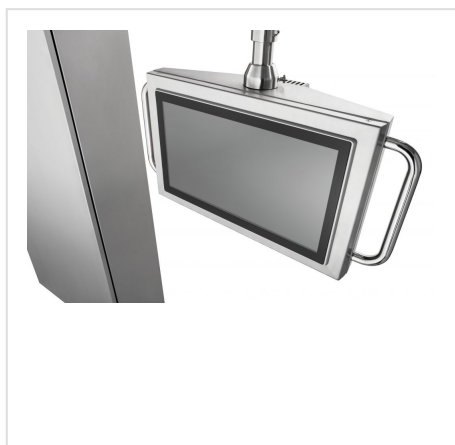



DOCUMENTS



CATALOGUE CARD [Kliknij aby pobrać](#)



Declaration of compliance for Radiolex products [Kliknij aby pobrać](#)



Powder coatings maintenance instructions [Kliknij aby pobrać](#)

The following table presents empty enclosures.

No.	Description	Catalogue No.	Catalogue No.	Catalogue No.
		PM-ST	PM-OH	PM-KO
1	Enclosure for 10.1" monitor	600-001	601-001	602-001
2	Enclosure for 15.6" monitor	600-001	601-002	602-002
3	Enclosure for 21.5" monitor	600-003	601-003	603-003

XP500 Monitor

No. Description Catalogue No.

1	10.1" Monitor	5.174474
2	15,6" Monitor	5.174475
3	21,5" Monitor	5.174476