

Water – air heat exchangers

[HOME](#) > [CATEGORIES](#) > [AIR CONDITIONING CONTROL CABINETS](#) > [WATER – AIR HEAT EXCHANGERS](#)


Our compact air-water heat exchangers can be used in any place with access to cold water. Typical application is discharge of heat from the control cabinets.

19" heat exchangers models with plugs are available of minimum depth, with installation options indoors, on a roof or a side.

Industrial heat exchangers are available in versions from 650 W to 5.5 kW (L35W10).

When applying our modular system, you may have a combined power of up to 40 kW.

GALERIA PRODUKTU WRAZ Z PRZYKŁADOWYMI REALIZACJAMI

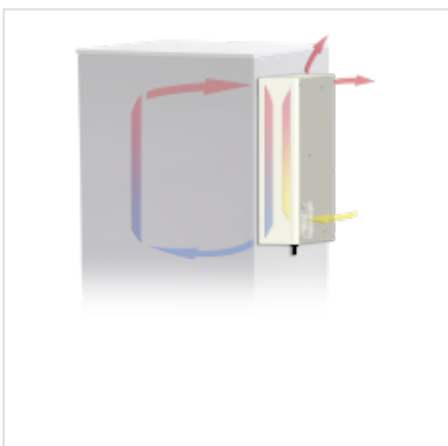

No.	Model	Cooling power L35W10 (200 l / h)	Voltage and frequency	Dimensions [mm] (width x height depth)	montage	Catalogue No
1	RK 2114 A 400	650 W @ 50 Hz	230 V - 50/60 Hz	212 x 400 x 80	wew. / zew.	5.2114003
2	RK 2114 A 400	650 W @ 50 Hz	120 V - 60 Hz	212 x 400 x 80	wew. / zew.	5.2114103
3	RK 2114 A 400	650 W @ 50 Hz	380-415 V 50 Hz 3~	212 x 400 x 80	wew. / zew.	5.5070048
4	RK 2114 A 400	650 W @ 50 Hz	400-460 V 60 Hz 3~	212 x 400 x 80	wew. / zew.	5.2114203
5	RK 2114 A 400	650 W @ 50 Hz	24 V DC	212 x 400 x 80	wew. / zew.	5.2114403
6	RK 2114 A 632	700 W @ 50 Hz	48 V DC	212 x 632 x 80	wew. / zew.	5.2114014
7	RK 2114 A 632	700 W @ 50 Hz	230 V - 50/60 Hz	212 x 632 x 80	wew. / zew.	5.2114114
8	RK 2114 A 632	700 W @ 50 Hz	120 V - 60 Hz	212 x 632 x 80	wew. / zew.	5.2114214
9	RK 2114 A 891	1,2 kW @ 50 Hz	380-415 V 50 Hz 3~	212 x 891 x 80	wew. / zew.	5.2114010
10	RK 2114 A 891	1,2 kW @ 50 Hz	400-460 V 60 Hz 3~	212 x 891 x 80	wew. / zew.	5.2114110
11	RK 2114 A 891	1,2 kW @ 50 Hz	230 V - 50/60 Hz	212 x 891 x 80	wew. / zew.	5.2114210
12	RK 2116	2,50 kW @ 50 Hz	120 V - 60 Hz	212 x 891 x 105	wew. / zew.	5.2116010
13	RK 2116	2,50 kW @ 50 Hz	380-415 V 50 Hz 3~	212 x 891 x 105	wew. / zew.	5.2116110
14	RK 2116	2,50 kW @ 50 Hz	400-460 V 60 Hz 3~	212 x 891 x 105	wew. / zew.	5.2116210
15	RK 2149	5,5 kW @ 50 Hz (500 l/h)	230 V - 50/60 Hz	262 x 936 x 147	zewewnętrzny	5.2125010
16	RK 2149	5,5 kW @ 50 Hz (500 l/h)	120 V - 60 Hz	262 x 936 x 147	zewewnętrzny	5.2125110
17	RK 2149	5,5 kW @ 50 Hz (500 l/h)	380-415 V 50 Hz 3~	262 x 936 x 147	zewewnętrzny	5.2125210
18	RK 2192	1 kW @ 50 Hz	400-460 V 60 Hz 3~	443 x 2HE x 408	montaż 19"	5.2192000
19	RK 2192	1 kW @ 50 Hz	230 V - 50/60 Hz	443 x 2HE x 408	montaż 19"	5.84195000
20	RK 2194	2,0 kW @ 50 Hz	120 V - 60 Hz	443 x 4HE x 505	montaż 19"	5.2194000
21	RK 2192	2,0 kW @ 50 Hz	380-415 V 50 Hz 3~	443 x 4HE x 505	montaż 19"	5.2194100
22	RK 2197	2,0 kW @ 50 Hz	400-460 V 60 Hz 3~	443 x 4U x 544	montaż 19"	5.21970001
23	RK 2197	2,10 kW @ 50 Hz	230 V - 50/60 Hz	443 x 4U x 544	montaż 19"	5.21971001
24	RK 2124	2 kW @ 50 Hz	120 V - 60 Hz	360 x 280 x 600	montaż dachowy	5.2124000
25	RK 2124	2 kW @ 50 Hz	230 V - 50/60 Hz	360 x 280 x 600	montaż dachowy	5.2124100
26	RK 2200	2,75 kW @ 50 Hz (500 l/h)	120 V - 60 Hz	600 x 230 x 500	montaż dachowy	5.2200000
			230 V - 50/60 Hz			
			120 V - 60 Hz			
			230 V - 50/60 Hz			
			120 V - 60 Hz			
			230 V - 50/60 Hz			

