

Cabinet cooling unit KG 8508-230V



Product Features

Brand Name:	SlimLine Pro
Order Number:	850800001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12,3,3R, 4
Note:	pat. D815,265
Approvals:	CE, RoHS


Accessories:	Aluminum filter	
	Cold air outlet duct	
Taric Code:	84158200	

Technical data KG 8508-230V

Cooling capacity L35L35:	825 W @ 50 Hz 870 W @ 60 Hz
Cooling capacity L35L50:	820 W @ 50 Hz 835 W @ 60 Hz
Compressor:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	175 g / 6.17 oz.
High / low pressure:	25 / 6 bar 363 / 87 psig
Temperature range:	+10°C - +60°C
Air volume flow (system / unimpeded):	Ambient air circuit: 370 / 650 m ³ /h Cabinet air circuit: 350 / 550 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	950 x 305 x 210 mm
Weight:	25.2 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	2.1 A @ 50 Hz 2.3 A @ 60 Hz
Starting current:	6 A
Max. current:	3 A
Nominal power L35L35:	460 W @ 50 Hz 520 W @ 60 Hz
Max. power:	690 W
Fuse:	5.5 A (T)
Connection:	5 pole terminal for signals 4 pole terminal for power


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

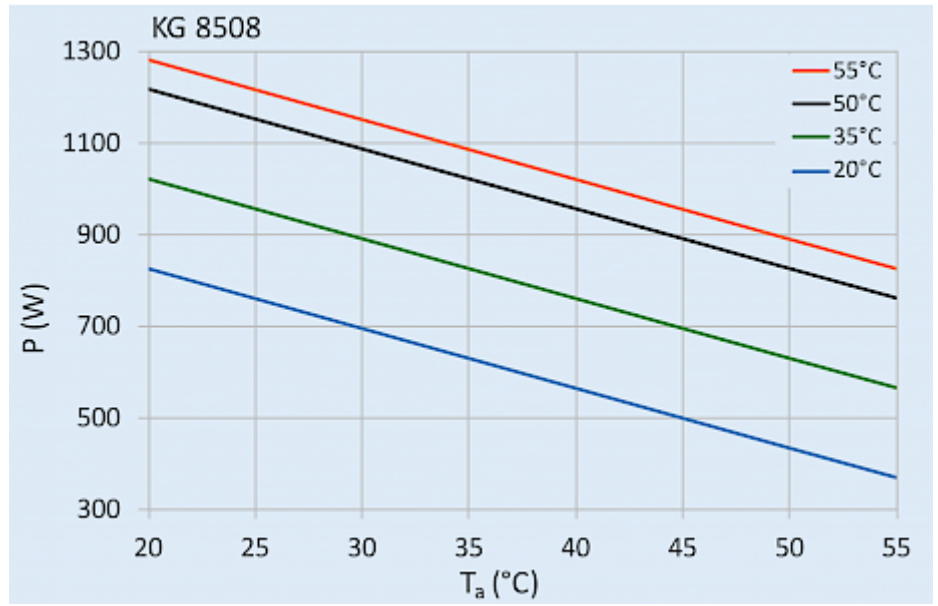


[click image to enlarge](#)

Cut out dimensions:

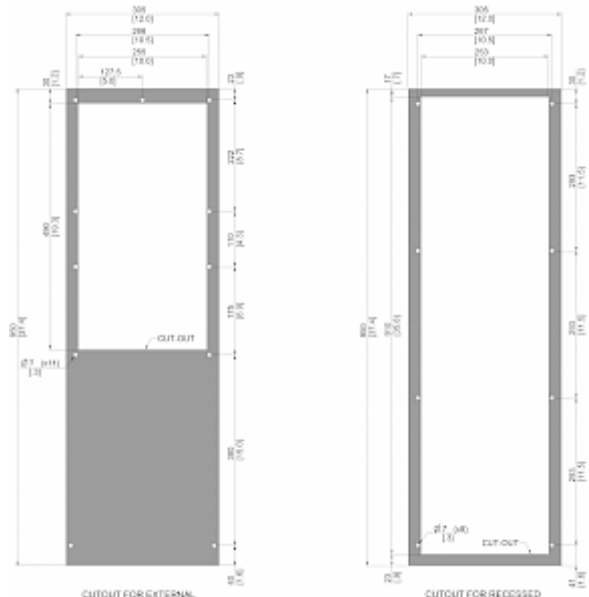

[click image to enlarge](#)

Product Accessories:

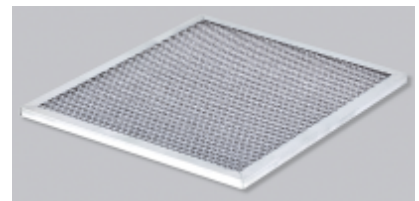

[click image to enlarge](#)