



Cabinet cooling unit KG 8512-400V



Product Features

Brand Name:	SlimLine Pro
Order Number:	851220001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12,3,3R, 4
Note:	pat. D815,265
Approvals:	CE, RoHS
Accessories:	Aluminum filter 
	Cold air outlet duct 
Taric Code:	84158200

Technical data KG 8512-400V


Cooling capacity L35L35:	1.20 kW @ 50 Hz 1.26 kW @ 60 Hz
Cooling capacity L35L50:	900 W @ 50 Hz 1 kW @ 60 Hz
Compressor:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	228 g / 8.04 oz.
High / low pressure:	26 / 6 bar 377 / 87 psi
Temperature range:	10°C - +60°C
Air volume flow (system / unimpeded):	Ambient air circuit: 300 / 550 m ³ /h Cabinet air circuit: 350 / 550 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	950 x 305 x 210 mm
Weight:	33 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Current L35L35:	1.5 A
Starting current:	8.2 A
Max. current:	2.0 A
Nominal power L35L35:	700 W @ 50 Hz 875 W @ 60 Hz
Max. power:	1.2 kW
Fuse:	3.5 A (T)
Connection:	5 pole terminal for signals 4 pole terminal for power

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

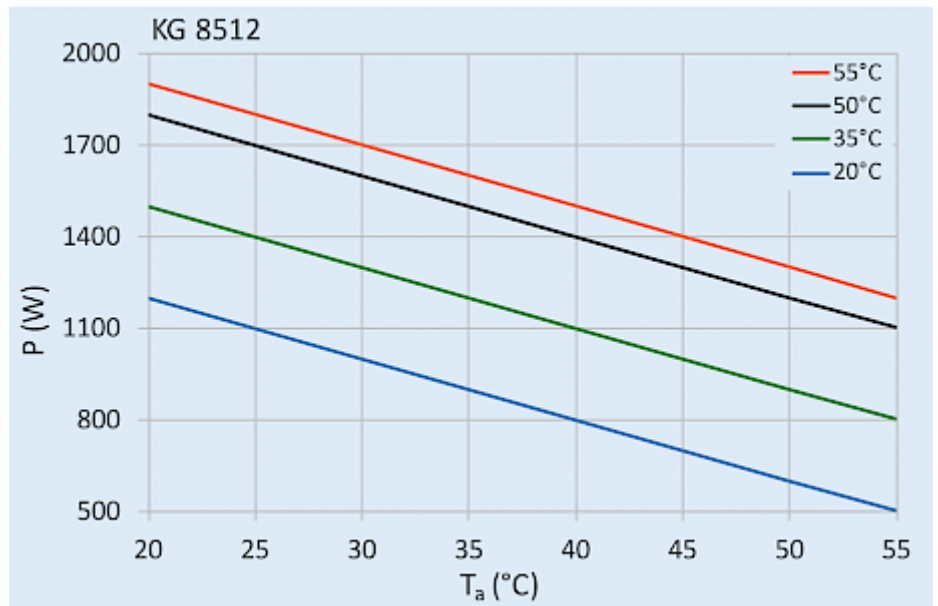


[click image to enlarge](#)

Cut out dimensions:

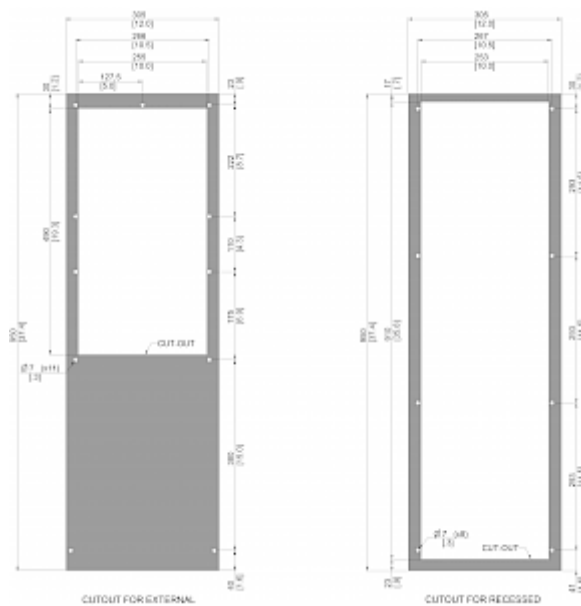

[click image to enlarge](#)

Product Accessories:

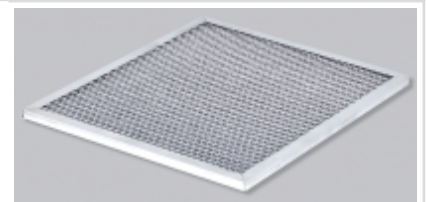

[click image to enlarge](#)