

Cabinet cooling unit KG 8525-230V



Product Features

Brand Name:	SlimLine Pro
Order Number:	852500001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12, 3, 3R, 4
Note:	pat. D815,265
Approvals:	CE, RoHS

Accessories:	Aluminum filter	
	Cold air outlet duct	
Taric Code:	84158200	

Technical data KG 8525-230V


Cooling capacity L35L35:	2.5 kW @ 50 Hz 2.5 kW @ 60 Hz
Cooling capacity L35L50:	2.1 kW @ 50 Hz 2.1 kW @ 60 Hz
Compressor:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	400 g / 14,1 oz
Temperature range:	10°C - +60°C
Air volume flow (system / unimpeded):	Ambient air circuit: 680 / 1200 m ³ /h Cabinet air circuit: 500 / 850 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	1,350 x 395 x 210 mm
Weight:	47 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	5.4 A
Starting current:	22.5 A
Max. current:	7.9 A
Nominal power L35L35:	1.2 kW
Max. power:	1.95 kW
Fuse:	13 A (T)
Connection:	5 pole terminal for signals 4 pole terminal for power

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

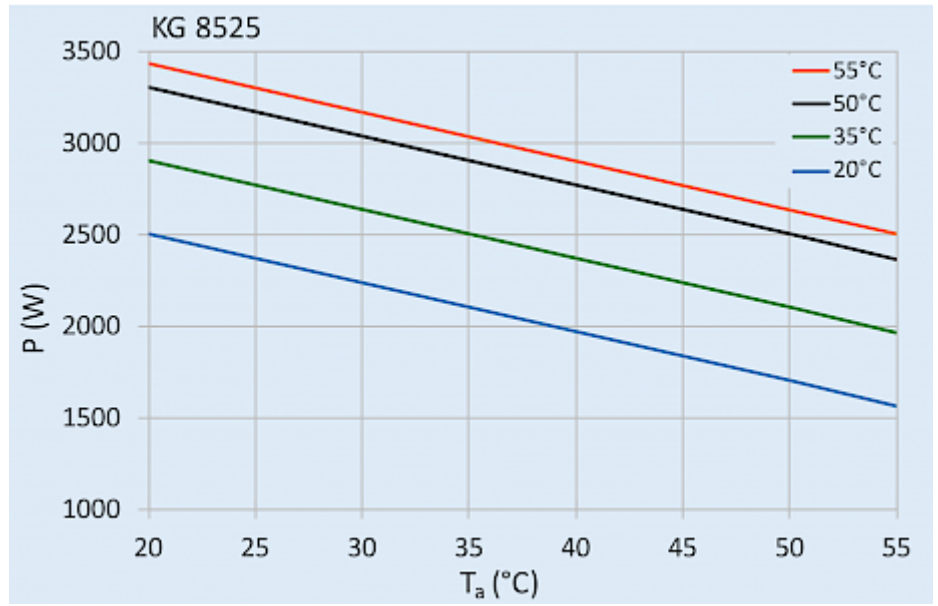


[click image to enlarge](#)

Cut out dimensions:

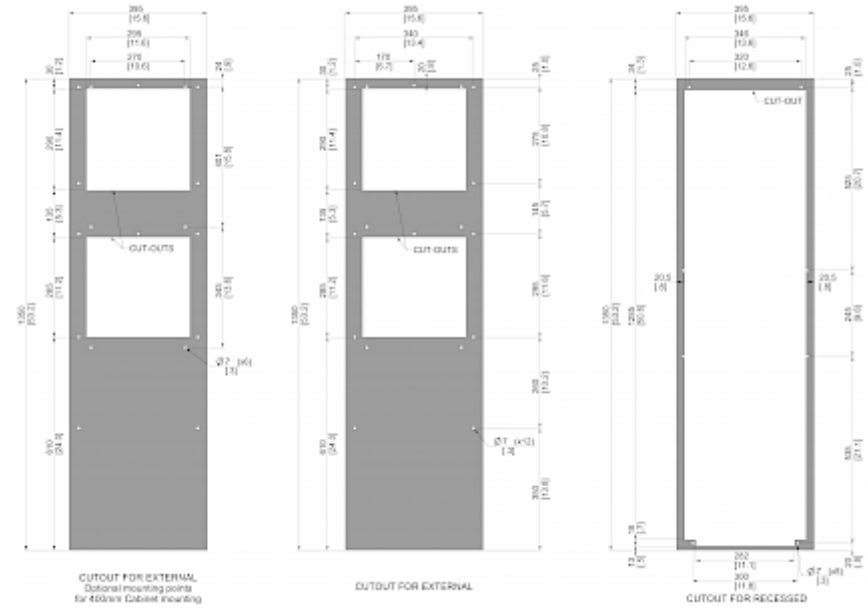

[click image to enlarge](#)

Product Accessories:

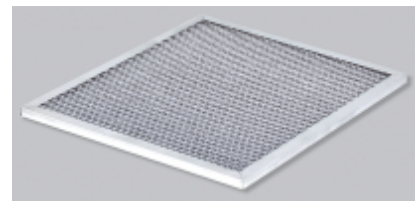

[click image to enlarge](#)