



Cabinet cooling unit KG 8525-400V



Product Features


Brand Name:	SlimLine Pro
Order Number:	852520001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12, 3, 3R, 4
Note:	pat. D815,265
Approvals:	CE, RoHS
Accessories:	Aluminum filter 
	Cold air outlet duct 
Taric Code:	84158200

Technical data KG 8525-400V

Cooling capacity L35L35:	2.5 kW @ 50 Hz 2.5 kW @ 60 Hz
Cooling capacity L35L50:	2.1 kW @ 50 Hz 2.1 kW @ 60 Hz
Compressor:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	340 g / 12 oz
Temperature range:	10°C - +60°C
Air volume flow (system / unimpeded):	Ambient air circuit: 680 / 1200 m ³ /h Cabinet air circuit: 500 / 850 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	1,350 x 395 x 210 mm
Weight:	45 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Current L35L35:	2.7 A @ 50 Hz 2.7 A @ 60 Hz
Starting current:	20 A
Max. current:	3.1 A
Nominal power L35L35:	1.23 kW @ 50 Hz 1.5 kW @ 60 Hz
Max. power:	2.0 kW
Fuse:	5.5 A (T)
Connection:	5 pole terminal for signals 4 pole terminal for power


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

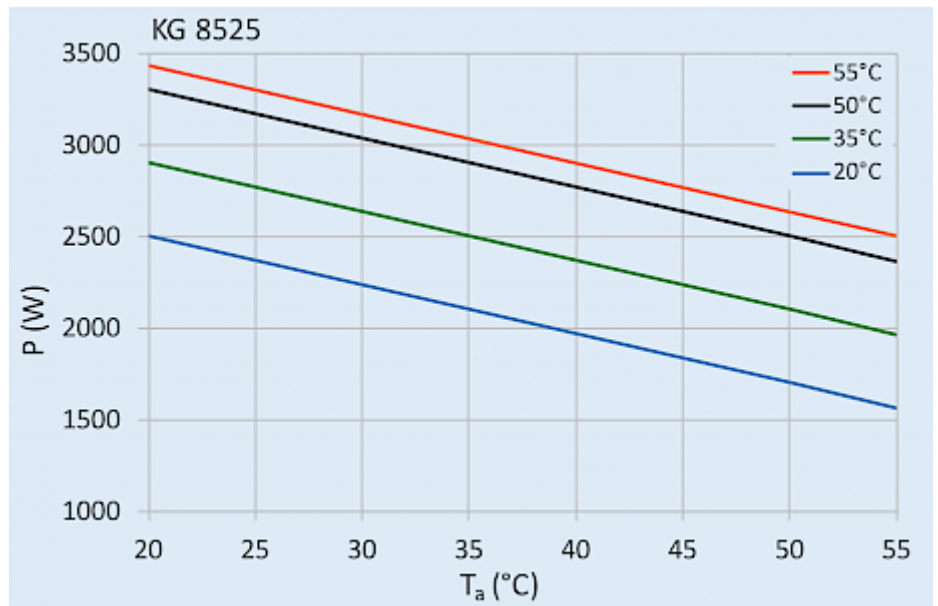


click image to enlarge

Cut out dimensions:

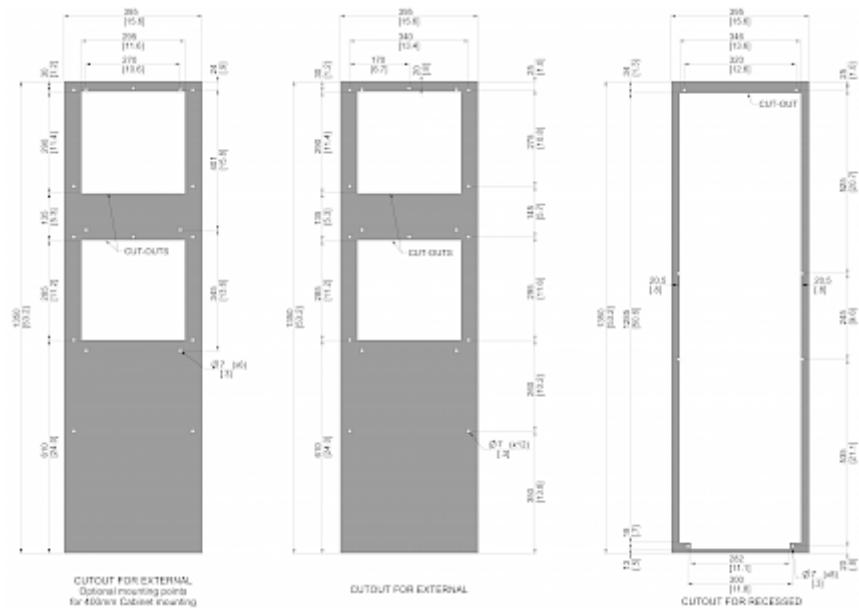

click image to enlarge

Product Accessories:

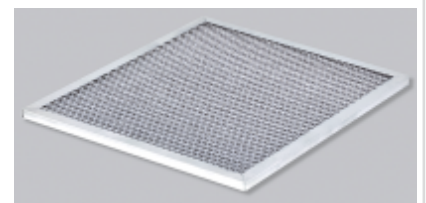

click image to enlarge