



Cabinet cooling unit KG 8562-400V



Product Features

Brand Name:	SlimLine Pro
Order Number:	856220001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12, 3, 3R, 4
Note:	pat. D815,265
Approvals:	CE, RoHS
Accessories:	Aluminum filter 
	Cold air outlet duct 
Taric Code:	84158200


Technical data KG 8562-400V

Cooling capacity L35L35:	6.0 kW @ 50 Hz 6.2 kW @ 60 Hz
Cooling capacity L35L50:	5.0 kW @ 50 Hz 5.5 kW @ 60 Hz
EER L35L35:	2.0
Compressor:	Scroll
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	1,384 g / 48.8 oz.
High / low pressure:	6 / 38 Bar 87 / 551 psig
Temperature range:	10°C - +55°C
Air volume flow (system / unimpeded):	Ambient air circuit: 1000 / 1400 m ³ /h Cabinet air circuit: 750 / 1200 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	1,630 x 455 x 270 mm
Weight:	86 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Current L35L35:	6.2 A @ 50 Hz 6.3 A @ 60 Hz
Starting current:	52 A
Max. current:	10.5 A
Nominal power L35L35:	3.1 kW @ 50 Hz 3.9 kW @ 60 Hz
Max. power:	7.0 kW
Fuse:	18 A (T)
Connection:	5 pole terminal for signals 4 pole terminal for power

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).
> [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

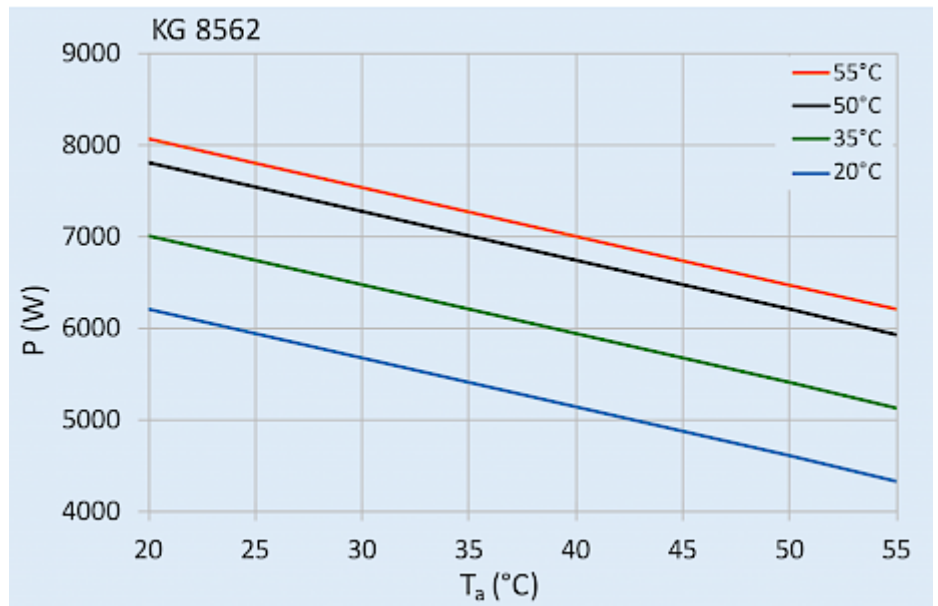


[click image to enlarge](#)

Cut out dimensions:

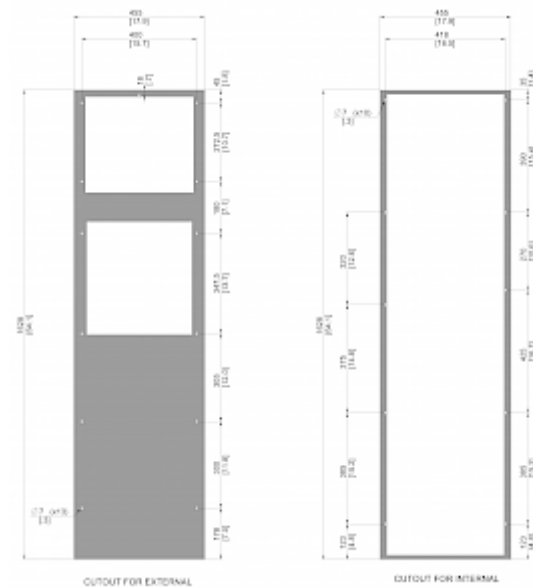

[click image to enlarge](#)

Product Accessories:

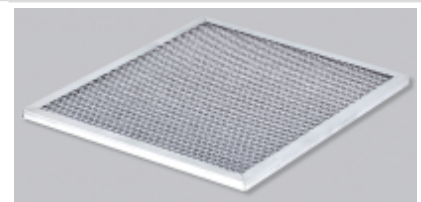

[click image to enlarge](#)