

Ex-cable glands ADE 1F2



ADE 1F2 ISO

3

Ordering details


ISO	Type	Cable Ø outside mm	A mm	B mm	E mm	L mm	Order No. CuZn gal. Ni	Order No. stainless steel
Cable gland type ADE 1F2 for unarmoured cable with ISO thread								
M12 x 1.5	4	4.5 - 8	17	17	15	25	CAP 806 404 V1	CAP 806 409 V1
M16 x 1.5	4	4.5 - 8.5	19	17	15	25	CAP 806 594 V1	CAP 806 599 V1
M16 x 1.5	5	7 - 12	19	19	15	27.5	CAP 806 504 V1	CAP 806 509 V1
M20 x 1.5	3	2.75 - 5.5	24	15	15	24	CAP 806 664 V1	CAP 806 669 V1
M20 x 1.5	4	4.5 - 8.5	24	17	15	25	CAP 806 674 V1	CAP 806 679 V1
M20 x 1.5	5	7 - 12	24	19	15	27.5	CAP 806 694 V1	CAP 806 699 V1
M20 x 1.5	6	10 - 16	24	24	15	32	CAP 806 604 V1	CAP 806 609 V1
M25 x 1.5	5	7 - 12	30	19	15	27.5	CAP 806 774 V1	CAP 806 779 V1
M25 x 1.5	6	10 - 16	30	24	15	32	CAP 806 794 V1	CAP 806 799 V1
M25 x 1.5	7	13.5 - 20.5	30	30	15	36.5	CAP 806 704 V1	CAP 806 709 V1
M32 x 1.5	8	18 - 27.5	41	41	15	46	CAP 806 804 V1	CAP 806 809 V1
M40 x 1.5	9	23 - 34	48	48	15	50	CAP 806 904 V1	CAP 806 909 V1
M50 x 1.5	10	29 - 41	55	55	16	52	CAP 807 004 V1	CAP 807 009 V1
M50 x 1.5	11	35 - 45	64	64	16	56.5	CAP 807 084 V1	CAP 807 089 V1
M63 x 1.5	12	42 - 56	72	72	17	60	CAP 807 204 V1	CAP 807 209 V1
M75 x 1.5	13	50 - 65	85	85	18	67.5	CAP 807 304 V1	CAP 807 309 V1
M90 x 2.0	14	58 - 74	95	95	22	69	CAP 807 594 V1	CAP 807 599 V1
M90 x 2.0	15	66 - 83	110	110	22	80	CAP 807 504 V1	CAP 807 509 V1
M110 x 2.0	16	75 - 93	120	120	22	80	CAP 807 604 V1	CAP 807 609 V1
M110 x 2.0	17	85 - 104	135	135	22	90	CAP 807 704 V1	CAP 807 709 V1

Please use sealing washers (see page 2.3.28).

For cable gland kits with washer and lock nut please add "K1" at the end of the order No.

Example: **CAP 806 404 V1 K1** contains a **ADE 1F2 M12 x 1.5 type 4 + 1 x MsNi lock nut M12 + 1 x green fibre gasket for M12**

Dimension drawing

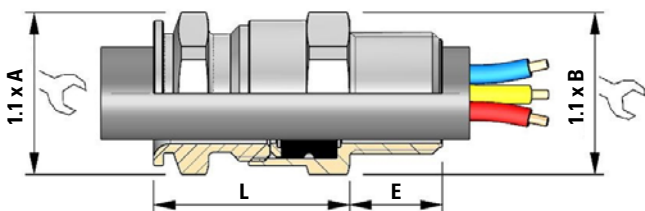

Type ADE 1F2

Dimensions in mm



ADE 1F2 NPT

Ordering details


NPT	Type	Cable Ø outside mm	A mm	B mm	E mm	L mm	Order No. CuZn gal. Ni	Order No. stainless steel
Cable gland type ADE 1F2 for unarmoured cable with NPT thread								
1/2"	3	2.75 - 5.5	24	15	22.2	24	CAP 808 664 V1	CAP 808 669 V1
1/2"	4	4.5 - 8.5	24	17	22.2	26	CAP 808 674 V1	CAP 808 679 V1
1/2"	5	7 - 12	24	19	22.2	29.5	CAP 808 694 V1	CAP 808 699 V1
1/2"	6	10 - 15.5	24	24	22.2	32	CAP 808 604 V1	CAP 808 609 V1
3/4"	5	7 - 12	30	19	22.5	29.5	CAP 808 774 V1	CAP 808 779 V1
3/4"	6	10 - 16	30	24	22.5	32	CAP 808 794 V1	CAP 808 799 V1
3/4"	7	13.5 - 20.5	30	30	22.5	38.5	CAP 808 704 V1	CAP 808 709 V1
1"	8	18 - 26	41	41	27.3	46	CAP 808 804 V1	CAP 808 809 V1
1 1/4"	9	23 - 34	48	48	28	50	CAP 808 904 V1	CAP 808 909 V1
1 1/2"	10	29 - 41	55	55	28.5	52	CAP 809 004 V1	CAP 809 009 V1
2"	11	35 - 48	64	64	29.2	56.5	CAP 809 294 V1	CAP 809 299 V1
2"	12	42 - 53	72	72	29.2	60	CAP 809 204 V1	CAP 809 209 V1
2 1/2"	13	50 - 62.5	85	85	42.5	67.5	CAP 809 404 V1	CAP 809 409 V1
3"	14	58 - 74	95	95	44	69	CAP 809 594 V1	CAP 809 599 V1
3"	15	66 - 78	110	110	44	80	CAP 809 504 V1	CAP 809 509 V1
3 1/2"	16	75 - 92	120	120	45.2	80	CAP 809 604 V1	CAP 809 609 V1
4"	17	82 - 104	135	135	46.5	90	CAP 809 704 V1	CAP 809 709 V1

Please use sealing washers (see page 2.3.28).

For cable gland kits with washer and lock nut please add "K1" at the end of the order No.

Example: **CAP 808 604 V1 K1** contains a **ADE 1F2 1/2"** type 6 + 1 x MsNi lock nut 1/2" + 1 x green fibre gasket for 1/2"

Dimension drawing

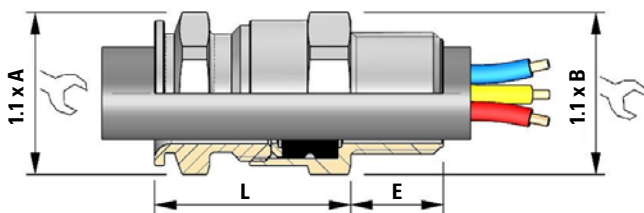

Type ADE 1F2