

## 39 Series Interface Relay

[HOME](#) > [CATEGORIES](#) > [EX RELAYS](#) > [SEPARATORS AND RELAYS EX](#) > [39 SERIES INTERFACE RELAY](#)

Narrow interface relay (coupling module) in ATEX version. 1-pole electromagnetic relay, module width: 6.2 mm. Perfect for PLC and electronic systems.

Complies with:

EN 60079-0

EN 60079-7

EN 60079-15

Directive 2014/34/EU

### PRODUCER

Finder

### APPLICATION

- Petrochemical and pharmaceutical chemical plants
- Gas stations, garages and underground areas
- Spray cabins (liquids)
- Gas power plants
- Gas bottling plants

### GENERAL INFORMATION

#### Series 39:

The interface consists of a socket and a relay assembled as a set.

1 changeover contact 6 A / 250(400) V AC.

Mounting on a DIN 35 rail.

Width: 6.2 mm.

Built-in protection circuit and LED indication.

## Series 39 with time interface:

The interface consists of a socket and a relay assembled as a set.

1 changeover contact 6 A / 250(400) V AC.

Mounting on a DIN 35 rail.

Width: 6.2 mm.

Possibility of using the module  
fuse in the output circuit.

The knob on the top of the socket for time setting.

4 time ranges

8 functions:

AI: Delayed activation

DI: Delayed disconnection

GI: Single control pulse 0.5 s

SW: Symmetrical pulser (START after applying voltage)


BE: Delayed disconnection (from the negative edge of the start signal)

CE: Delayed switching on, switching off with start signal

DE: Delayed disconnection (from the positive edge of the start signal)

EE: Delayed disconnection (from the negative edge of the start signal)

## GALERIA PRODUKTU WRAZ Z PRZYKŁADOWYMI REALIZACJAMI

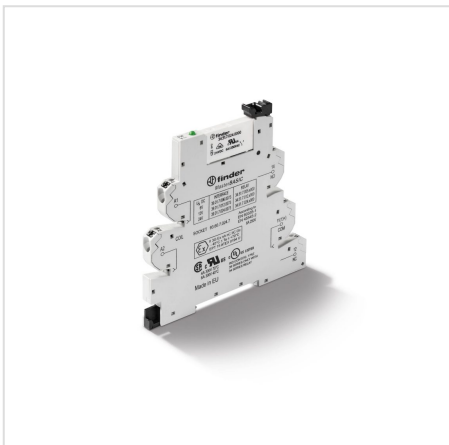

## DOCUMENTS

 [Datasheet Series 39 Kliknij aby pobrać](#)

 [EPTI 17 ATEX 0303 U Kliknij aby pobrać](#)

 [Declaration of Conformity Kliknij aby pobrać](#)

39 series interface relay

No.	Catalog code	Voltage coil	Nest
1	39.11.0.006.0073	6 V AC/DC	Screw
2	39.11.0.012.0073	12 V AC/DC	Screw
3	39.11.0.024.0073	24 V AC/DC	Screw
4	39.11.0.125.0073	110-125 V AC/DC	Screw
5	39.11.0.240.0073	24-240 V AC/DC	Screw
6	39.11.8.230.0073	230-240 V AC	Screw
7	39.01.0.006.0073	6 V AC/DC	Push-in
8	39.01.0.012.0073	12 V AC/DC	Push-in
9	39.01.0.024.0073	24 V AC/DC	Push-in
10	39.01.0.125.0073	110-125 V AC/DC	Push-in
11	39.01.0.240.0073	24-240 V AC/DC	Push-in
12	39.01.8.230.0073	230-240 V AC	Push-in

### 39 series interface time relay

No.	Catalog code	Voltage coil	Nest
1	39.81.0.012.0073	12 V AC/DC	Screw
2	39.81.0.024.0073	24 V AC/DC	Screw
3	39.91.0.012.0073	12 V AC/DC	Push-in
4	39.91.0.024.0073	24 V AC/DC	Push-in