

Outdoor Air Conditioner OC 5710-230V



Product Description

Brand name:	SoliTherm ComPact Outdoor
Order Number:	571000001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 56 (NEMA 12, 3, 3R, 4)
Approvals:	CE
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data OC 5710-230V

Cooling capacity / output L35L35:	1.00 kW @ 50 Hz
	1.08 kW @ 60 Hz
Cooling capacity / output L35L50:	660 W @ 50 Hz
	720 W @ 60 Hz
Heating capacity:	400 W (optional)
Compressor:	Reciprocating compressor
Refrigerant:	R134a
Refrigerant charge:	280 g
Operating temperature range:	-20°C - +55°C
Max. air volume flow:	Ambient air circuit: 320 m ³ /h
	Cabinet air circuit: 375 m ³ /h
Mounting:	External
Dimensions (H x W x D):	900 x 315 x 270 mm
Weight:	38 kg
Rated operating voltage / frequency:	230 V - 50/60 Hz
Rated current L35L35:	3.2 A
Starting current:	15.9 A
Max. current:	4.1 A
Power consumption L35L35:	550 W @ 50 Hz
	640 W @ 60 Hz
Max. power consumption:	820 W
Fuse rating:	10 A (T)
Connection:	Connection terminal block


Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperatur
P = Cooling capacity

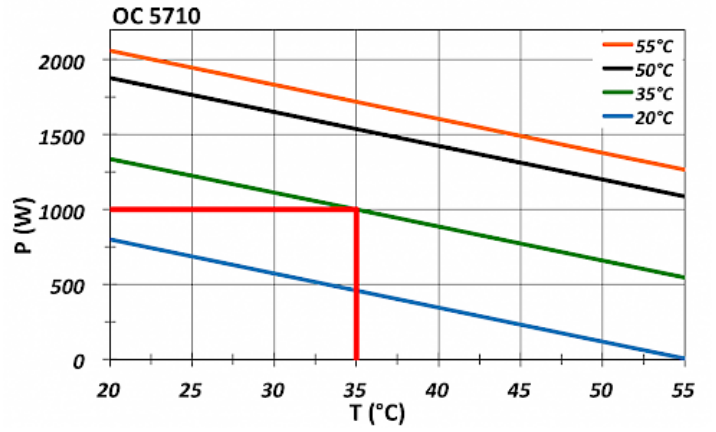

click image to enlarge

Cutout diagram:

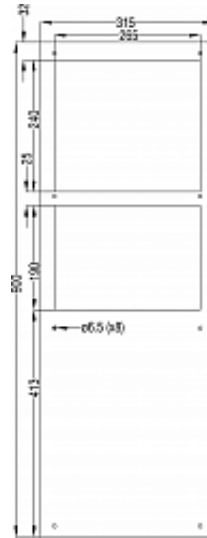

click image to enlarge

[Datasheet](#) created 27.04.2015 (15:11:52). Technical rights reserved.