

Outdoor Air Conditioner OC 5715-400V



Product Description

Brand name:	SoliTherm ComPact Outdoor
Order Number:	571520001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 56 (NEMA 12, 3 ,3R, 4)
Approvals:	CE
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data OC 5715-400V

Cooling capacity / output L35L35:	1.50 kW @ 50 Hz 1.63 kW @ 60 Hz
Cooling capacity / output L35L50:	1.22 kW @ 50 Hz 1.32 kW @ 60 Hz
Heating capacity:	1,000 W (optional)
Compressor:	Reciprocating compressor
Refrigerant:	R134a
Operating temperature range:	-20°C - +55°C
Max. air volume flow:	Ambient air circuit: 655 m ³ /h Cabinet air circuit: 400 m ³ /h
Mounting:	External
Dimensions (H x W x D):	1,150 x 395 x 270 mm
Weight:	55 kg
Rated operating voltage / frequency:	400/460 V - 50/60 Hz 2~
Rated current L35L35:	2.9 A @ 400 V 2.5 A @ 460 V
Starting current:	5.3 A
Max. current:	3.5 A @ 400 V 3.1 A @ 460 V
Power consumption L35L35:	880 W @ 400/460 V - 50 Hz 1 kW @ 400/460 V - 60 Hz
Max. power consumption:	1.29 kW
Fuse rating:	2 x 6 A (T)
Connection:	Connection terminal block

Click the graphics to download the originals.


More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperatur

P = Cooling capacity

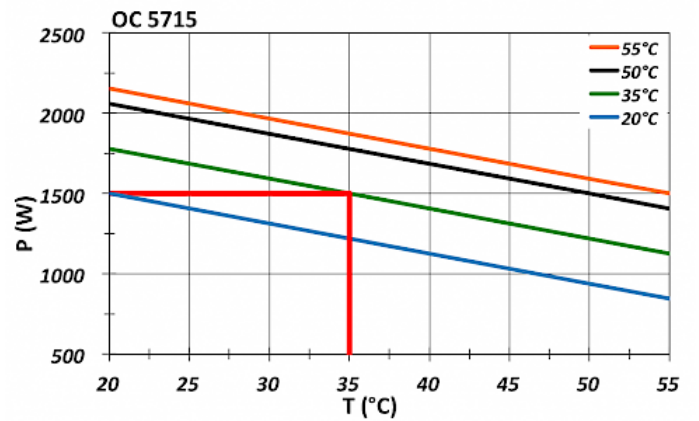

click image to enlarge

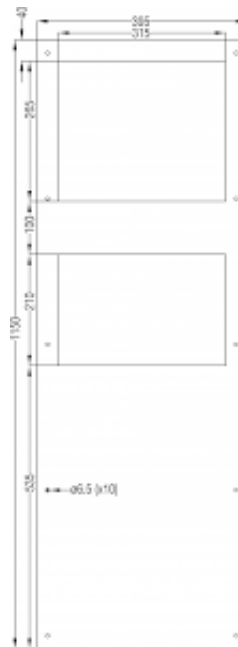Cutout diagram:


click image to enlarge

[Datasheet](#) created 22.07.2015 (12:16:20). Technical rights reserved.