

Enclosure cooling unit



Description

Order Number:	87200584
Housing Material:	Stainless steel AISI 316 (V4A)
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	Metal mesh filter
Approvals:	CE, UL(ACVS), cULus
UL File Number:	SA32278


Technical Data

Cooling capacity L35L35:	2.0 kW @ 50 Hz 2.1 kW @ 60 Hz
Cooling capacity L35L50:	1.85 kW @ 50 Hz 1.90 kW @ 60 Hz
Enclosure heater:	1,000 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	340 g / 12 oz
High / low Pressure:	30 / 6 bar 435 / 88 psi
Operating Temperature Range:	-40°C - 60°C
UL temperature range:	-40°C - 60°C
Air flow volume (system / unimpeded):	Ambient air circuit: 740 / 1150 m ³ /h Enclosure air circuit: 595 / 875 m ³ /h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	890 x 395 x 305 mm
Weight:	45.4 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current L35L35:	4.4 A @ 50 Hz 5.7 A @ 60 Hz
Starting current:	16 A
Max. current:	7.5 A
Nominal power L35L35:	1.0 kW @ 50 Hz 1.2 kW @ 60 Hz
Max. power:	1.65 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	4 A

Full load current fans:	0.73 A
Connection:	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

Please click on the graphics to download.
More CAD drawings can be found under [Product Download](#).
> [Overview Product Group Cooling units - PROTEC](#)

Performance graph:

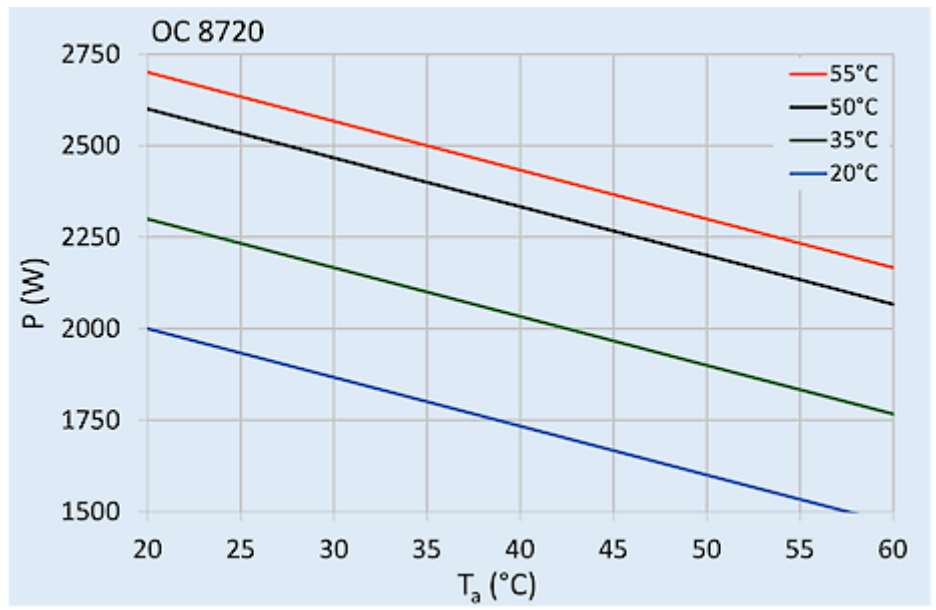

[click image to enlarge](#)

Order Information

Taric code

84158200
